

Variable Depletion Region in CMOS PN Photodiode for I-V Characteristic Analysis

M.A. Othman, T.S.M. Arshad, Z.A.F.M. Napiah, , M.M Ismail, N.Y.M. Yasin, H.A. Sulaiman, M.H. Misran, M.A. Meor Said, R.A. Ramlee

Centre for Telecommunication Research and Innovation (CeTRI), Faculty of Electronic and Computer Engineering, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, Durian Tunggal, 76100, Melaka, Malaysia

ARTICLE INFO

Article history:

Received 25 April 2014

Received in revised form

8 May 2014

Accepted 20 May 2014

Available online 17 June 2014

Keywords:

PN Photodiode, IV Characteristics

ABSTRACT

In this paper, CMOS PN photodiode will be design and analyze for the application at 5GHz optical communication. The paper will be divided in several section; the theory of CMOS PN photodiode and design with analysis of IV characteristics of PN photodiode. A better understanding of the operation will be investigated through this. The PN photodiode will be design using Silvaco TCAD and will be characterize and experimental in IV Characteristic. The effects of IV characteristic will be analyzed in term of changes the width and light. Further understanding of IV characteristic will be presents in this paper.

© 2014 AENSI Publisher All rights reserved.

To Cite This Article: M.A. Othman, T.S.M. Arshad, Z.A.F.M. Napiah, , M.M Ismail, N.Y.M. Yasin, H.A. Sulaiman, M.H. Misran, M.A. Meor Said, R.A. Ramlee, Variable Depletion Region in CMOS PN Photodiode for I-V Characteristic Analysis. *Aust. J. Basic & Appl. Sci.*, 8(21): 99-104, 2014

INTRODUCTION

PN junction is one of the most simple of all semiconductor devices because it is much faster and very small in size and weight. It is the only most important device in the studies of modern semiconductors. It is the heart of the most photocells, rectifiers and transistors. It is also cheaper and has greater sensitivity (Chiang, 2000).

PN junction forms a diode, and consequently a junction used as a photodetector is frequently called a photodiode (Alexander, 1997). It is formed by doping donor atoms on one side (N-side) and doping acceptor atoms on the other (P-side). Figure 1 shows the structure of PN photodiode (Nair, 2006). In this paper, the authors concentrate on the geometry of PN photodiode using different size of P+ region and its effects toward the I-V characteristics PN photodiode. The structure of PN photodiode is simulated with different size of P+ region and the analysis of I-V characteristic, which is use Silvaco TCAD tools discussed in the next topic.

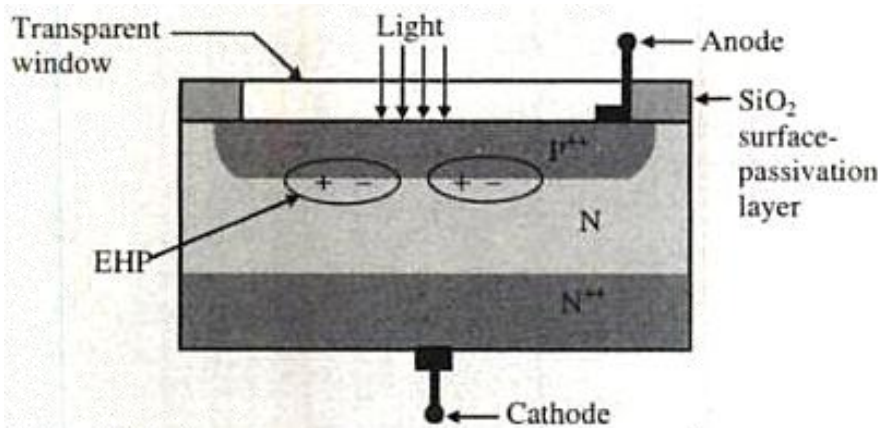


Fig. 1: PN Junction Photodiode.

The PN junction operated in the reverse biased condition. The PN photodiode operation involving light and the light will be directed fall on the upper top of the portion of the photodiode. The depth where photons come

Corresponding Author: M.A. Othman, Centre for Telecommunication Research and Innovation (CeTRI), Faculty of Electronic and Computer Engineering, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, Durian Tunggal, 76100, Melaka, Malaysia
E-mail: azlishah@utem.edu.my

into the depletion region depends on the wavelength of incident light. Electron-hole pairs will exist in the depletion region when the absorbed optical energy is sufficient. Electrons and holes are now attracted towards the opposite respective terminals of the battery. EHP that formed outside the depletion region will produce a photocurrent (Chou, 2010). When a reverse bias voltage is applied to the PN junction, more electrons and holes are attracted to the contact. As a result, more donor and acceptor ions appear at the depletion region which in turn increases as well. (Mohamad, 2010).

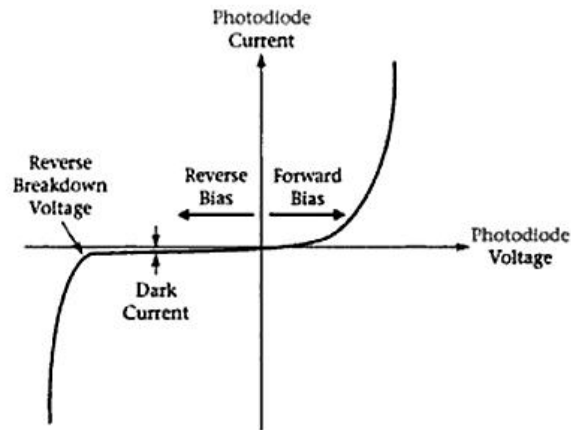


Fig. 2: IV Characteristic of PN photodiode.

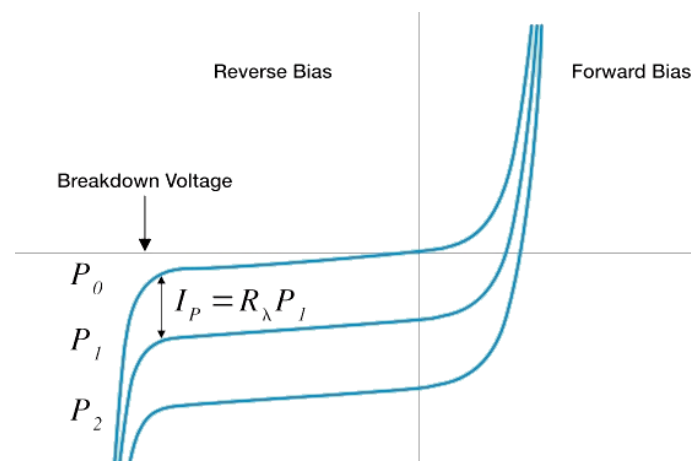


Fig. 3: IV Characteristics with different light level.

1. Design Procedure:

In this project, SILVACO TCAD tool is used to design the PN photodiode and simulate the I-V characteristic. ATLAS is a physically based device simulator, providing general capabilities for 2D and 3D simulation of semiconductor devices (Silvaco, 2000). In the Atlas project, it divided into 2 parts, which is the structure and the I-V curve simulation. In the structure part, mesh is needed to generate meshes that are suitable for the design of PN photodiode. There are some methods and model that used in the second part of the coding. It will use for the simulation of I-V curve.

RESULT AND DISCUSSIONS

Figure 4 and Figure 5 show the structure of the PN photodiode using Atlas tools. Two heavily doped P region and N region with doping concentration $1e+20$ is located beside each other. Two contacts for PN photodiode called anode and cathode is located at the top of P-type and N-type region. It may be noted that N-type and P-type region is formed within the n-well region. There is also a p-sub region which is located below n-well.

The reduction of depletion region width with increased the electric field and reduced breakdown voltage. The breakdown voltage of the structure with width, $W= 3 \mu\text{m}$ is 4.9V while the breakdown voltage for the

structure with width, $W = 1 \mu\text{m}$ is 4.7V. The applied electric field creates the depletion region on either side of the PN junction. Carriers – free electrons and holes – leave the junction area. The electric field and potential in the depletion region can affect the breakdown voltage. It can show from the equation below:

$$V_B = \frac{E_m W}{2} = \frac{\epsilon_s E_m^2}{2q} (N_B)^{-1} \quad (1)$$

From the equation (1), V_B is proportional to the W . As can be expected, reduce of depletion region can generate the small voltage breakdown. The structure that only uses less voltage supply will start the operation of reverse biased faster than the structure, which uses more voltage supply.

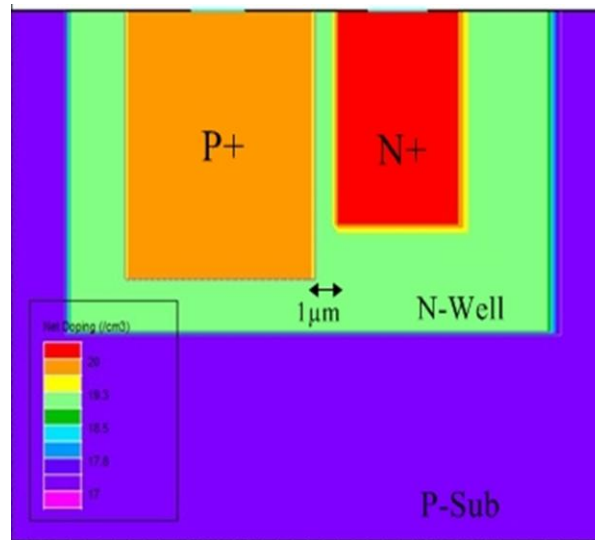


Fig. 4: PN Photodiode with width, $W = 1 \mu\text{m}$.

In reverse bias, the number of free carriers in the device depends primarily on the current in the device and the voltage is clamped at the knee voltage of the diode. Because of the IV curve for the photodiode in reverse bias is exponential, a small change in V has a much larger impact to the device.

For the analysis of presence of light, the second structure is chose, shown in Figure 6. From the analysis, some photons are incident on the surface of PN photodiode. Since the photon will pass through it and strike the junction. Light that is absorbed by the photodiode produces current flow through the entire external circuit.

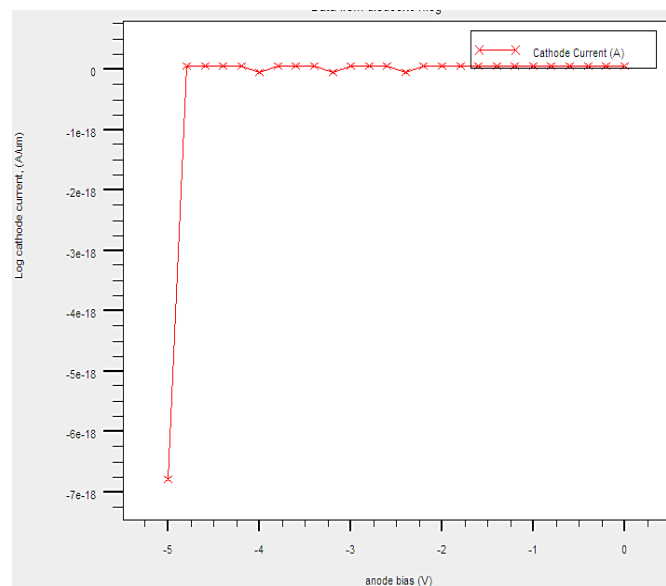


Fig. 5: IV curve for PN Photodiode with width, $W = 1 \mu\text{m}$.

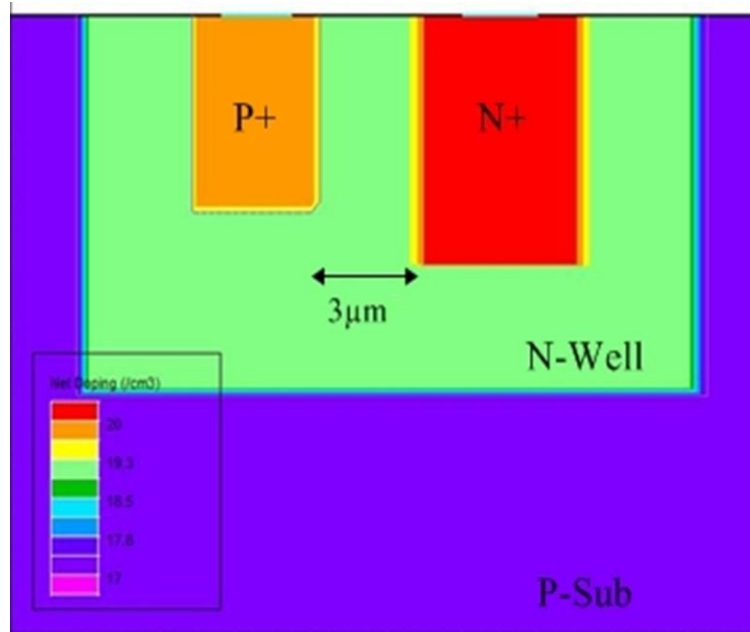


Fig. 6: PN Photodiode with width, $W=3\ \mu\text{m}$.

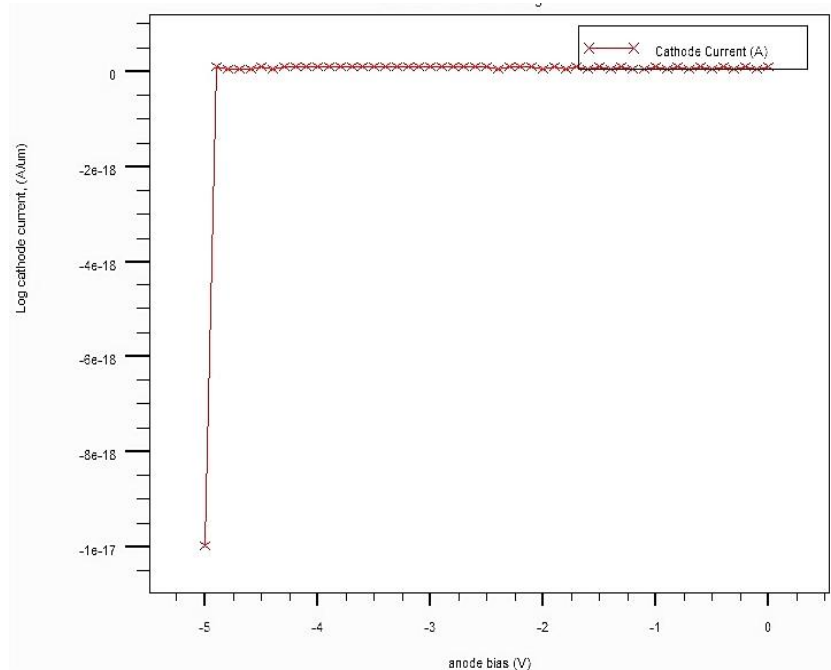


Fig. 7: IV curve for PN Photodiode with width, $W=3\ \mu\text{m}$.

In the analysis, two different width of PN photodiode have been tested in the device structure which are $1\ \mu\text{m}$ and $3\ \mu\text{m}$. By comparing both structures, the different of width is change due to the different size of P+. Since the size of P+ reduced, the width will also change. The IV Curve is compiled together as it is easier to view the trend of voltage breakdown versus the width depletion region. Figure 8 illustrates the simulation for both structures. From the result, it is shown that both photodiode are start from $V=0\text{V}$ and operated at the different reverse bias voltage.

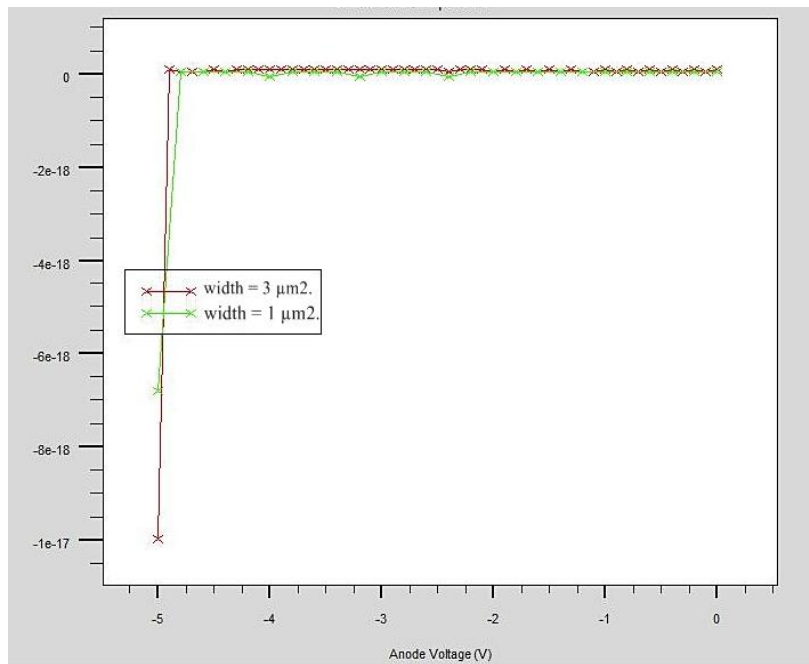


Fig. 8: I-V curve of PN Photodiode with different width.

The depth at which the photons reach into the depletion region depends on the incident of light. Figure 9 show the IV curve with no light falling on the PN photodiode. When no light is falling on the photodiode, a very small current passes through the photodiode. This current is basically due to the reverse bias applied to the PN photodiode.

Figure 10 show the IV curve with light falling on the PN photodiode. As the light is incident on the photodiode, photocurrent is developed. This photocurrent gets increased by increasing the light intensity.

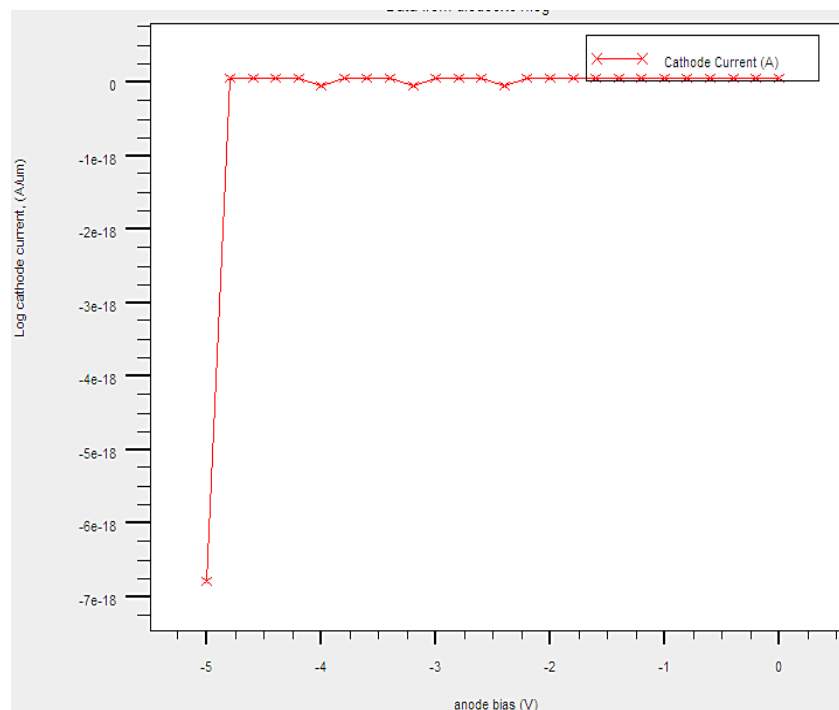


Fig. 9: IV curve for PN Photodiode without light.

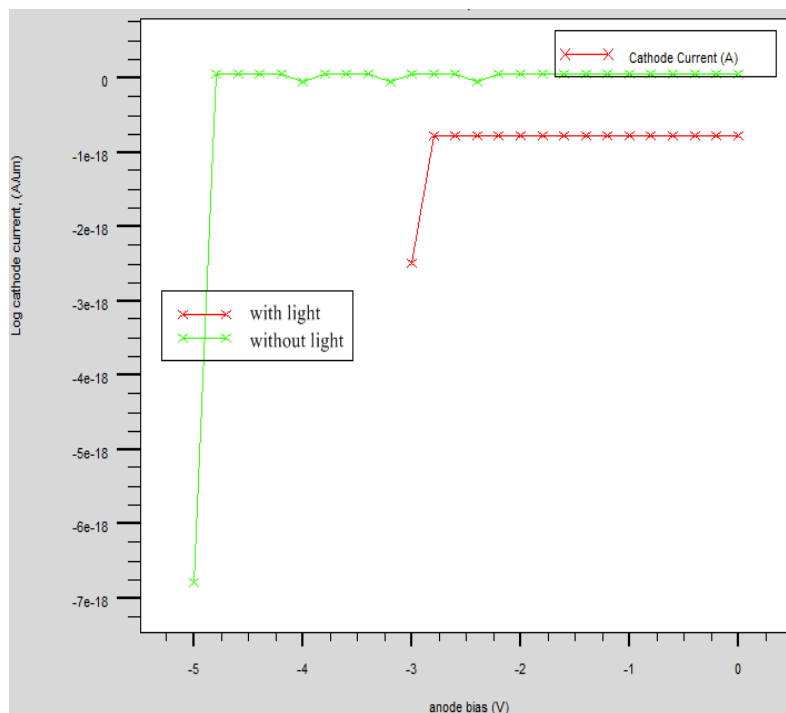


Fig. 10: I-V Curve of PN Photodiode with presence of light.

Conclusion:

In this paper, the different width of depletion region effects of the PN photodiode on its I-V characteristics has been successfully simulated and verified. The presence of light also affects the IV curve of the PN photodiode. In order to perform the I-V curve, the SILVACO TCAD is used. The result is compared between the different of structure. It is proved that the smaller width of depletion region, the better the device. From this paper also can conclude that the photocurrent gets increased by increasing the photon energy or light intensity.

ACKNOWLEDGMENTS

The authors would like to thanks Universiti Teknikal Malaysia Melaka, Malaysia (UTeM) for their equipment, financial and assistance support. Last but not list, the author would like to thanks those involved direct and indirect in completing this project success fully.

REFERENCES

- Alexander, S.B., 1997. "Optical Communication Receiver Design," SPIE Press.
- Chiang, C.Y.T. and Y.T. Yeow, 2000. "Inverse Modelling of Two-Dimensional MOSFET Dopant Profile via Capacitance of the Source/Drain Gated Diode," IEEE Transaction on Electron Devices, 47(7): 1385-1392.
- Chou, F., C. Wang, G. Chen, Y. Sin, 2010. "An 8.7 GHz Si photodiode in standard 0.18- μm CMOS technology," OECC, pp: 826-827.
- Mohamad, M., W.M. Jubadi, R. Tugiman, N. Zinal, R.M. Zin, 2010. "Comparison on I-V performances of Silicon PIN diode towards width variations," IEEE ICSE, pp: 12-14.
- Nair, B.S., 2006. "Electronic Devices and Application," Prentice-Hall India, pp: 329.
- Silvaco, 2000. "Atlas User's Manual: Device Simulation Software," Silvaco International.
- Sze, S.M., 2007. "Physics of Semiconductor Devices," John Wiley & Sons Publication, 3rd Edition.