



AENSI Journals

Australian Journal of Basic and Applied Sciences

ISSN:1991-8178

Journal home page: www.ajbasweb.com



Two Wheels Mobile Robot Navigation by Using a Low Cost Dataglove (*GloveMAP*)

²Nabilah H.E., ^{1,2}Khairunizam WAN, ²M.N. Ayob, ²Shahriman AB, ^{2,3}Nazrul H. ADNAN, ¹D. Hazry, ¹Zuradzman M. Razlan, ²M. Hazwan Ali, ²Rashidah Suhaimi and ²Aswad A.R

¹Centre of Excellence for Unmanned Aerial Systems (COEUAS).

²Advanced Intelligent Computing and Sustainability Research Group, School of Mechatronic Universiti Malaysia Perlis, Kampus Pauh Putra, 02600 Arau, Perlis, MALAYSIA.

³Bahagian Sumber Manusia, Tingkat 17 & 18, IbuPejabat MARA, Jalan Raja Laut, 50609 Kuala Lumpur, MALAYSIA.

ARTICLE INFO

Article history:

Received 20 November 2013

Received in revised form 24

January 2014

Accepted 29 January 2014

Available online 5 April 2014

Key words:

Mobile robot; Navigation; Dataglove;

Flexible bend sensor

ABSTRACT

A low cost wired glove system is developed by designing a new glove which has the similar function with the conventional dataglove and has been named as *GloveMAP*. The system involves the finger movements with some of activities to control the direction of the two wheels mobile robot. Flexible bend sensors are attached to the index and middle fingers to obtain the voltage changes from the different activities of fingers bending. The proposed systems successfully navigate the two wheels mobile robot by the combination of voltage changes from these two fingers to give the instruction for right, left, forward and backward directions.

© 2014 AENSI Publisher All rights reserved.

To Cite This Article: Nabilah H.E, Khairunizam WAN, M.N. Ayob, Shahriman AB, Nazrul H. ADNAN, D.Hazry, Zuradzman M. Razlan, M. Hazwan Ali, Rashidah Suhaimi and Aswad A.R, Two Wheels Mobile Robot Navigation by Using a Low Cost Dataglove (*GloveMAP*). *Aust. J. Basic & Appl. Sci.*, 8(4): 345-349, 2014

INTRODUCTION

For any mobile device, the ability to navigate in its environment is one of the most important capabilities of all. Staying operational for example avoiding dangerous situations likes collisions and staying within safe operating conditions such as temperature, radiation and exposure to weather. Robot behaviors consist of obstacle avoidance, target seeking, speed control, barrier following and local minimum avoidance (Omid Reza Esmaeili Motlagh, 2006). In order to navigate a mobile robot where it can determine its own position in its frame of reference, the robot need to plan a path towards the goal location and it requires representation for example a map of the environment and the ability to interpret the representation (Tang Sai Hong, Danial Nakhaeinia and Babak Karasfi, 2012).

Here, researches have been conduct to build other version of “wired glove” that share similar purpose known as *GloveMAP*. *GloveMAP* is a low cost “wired glove” that is designed to capture all data when the fingers are bending and the sample data will transmit to *CoolTerm* software. In this project dataglove (*GloveMAP*) is used to navigate the two wheels mobile robot.

The outline of this research paper consists of materials and methods for section 2 to presents the methodologies of applied procedures and the results in the Section 3. The Section 4 includes of discussion of the experiment. Finally section 5 expresses the conclusions over the current research.

MATERIALS AND METHODS

A. Voltage divider:

Voltage divider is used in this project to get a low voltage signal proportional to the voltage to be measured. A voltage divider is created by connecting two electrical impedances in series. Z_1 and Z_2 is an element such as resistors, inductors and capacitors or any combination of these three elements. The relationship between the input voltage, V_{in} , and the output voltage, V_{out} , can be found by applying Ohm’s law.

Corresponding Author: Nabilah H.E, Advanced Intelligent Computing and Sustainability Research Group, School of Mechatronic Universiti Malaysia Perlis, Kampus Pauh Putra, 02600 Arau, Perlis, MALAYSIA.
E-mail: nabilah_eleyas@yahoo.com




Fig. 1: Voltage divider circuit

$$V_{in} = I \cdot (Z_1 + Z_2) \tag{1}$$

$$I = \frac{V_{in}}{Z_1 + Z_2} \tag{2}$$

$$V_{out} = V_{in} \cdot \frac{Z_2}{Z_1 + Z_2} \tag{3}$$

Resistor of 22 KΩ is used as Z_2 and Flexible band as Z_1 for voltage divider circuit while V_{in} is the Flexible band supply voltage. The value of output voltage V_{out} from Flexible band will be the same as the value from calculation by theoretical equation (3).

A. Trigonometry Function:

The angle of fingers bending is decided based on trigonometry function. Trigonometry used in a calculation is Pythagorean Theorem and Point-Slope Equation as written in equation (4). Whereas (x_1, y_1) is known point, m is a slope of the line and (x, y) is any point on the line (M. Hazwan Ali *et al.*, 2013)

$$y - y_1 = m (x - x_1) \tag{4}$$

$$\frac{y - y_1}{y_2 - y_1} = \frac{x - x_1}{x_2 - x_1} \tag{5}$$

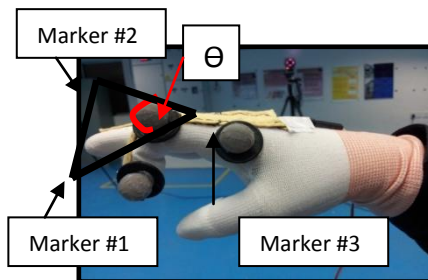


Fig. 2: Angle, θ

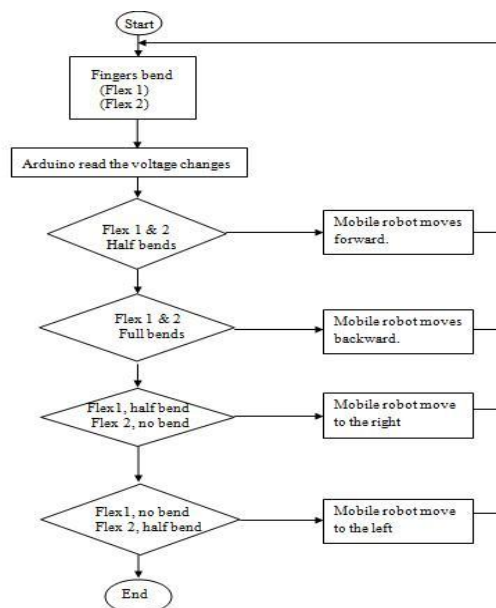


Fig. 3: Flowchart of the proposed works

Result:**A. Experimental Setup:**

The angle of finger's bending will be recorded by using motion capture system which was Qualisys Track Manager (QTM) software as a medium to get the angle of finger's bending. QTM was built around set of advanced motion capture algorithms to ensuring high performance, accuracy and low latency .

Glove was setup as shown in Fig. 4. Small pockets were developed to attach the flexible band sensor to the index and middle fingers.




Fig. 4: The small pockets attached to the glove

In this project, there were a few of activities that involve in order giving the instruction to the mobile robot. Fig. 5 was shown the activities of fingers for both index and middle fingers.

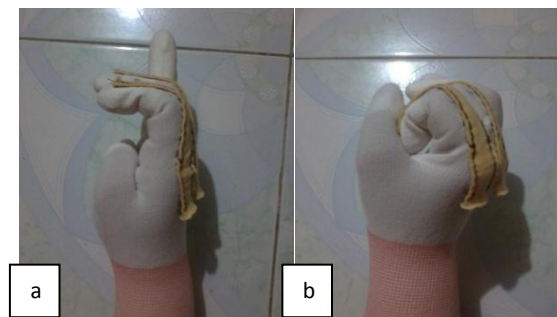


Fig. 5: Finger activities; (a) sensor#1 is half bend, sensor#2 is half bend (b) sensor#1 & sensor#2 are full bend.

Table 1: Activities trials for both fingers

Finger	No. Trial	Activities			
		Half bend		Full bend	
Index	2	HI_1	HI_2	FI_1	FI_2
Middle	2	HM_1	HM_2	FM_1	FM_2

The experiments were carried out twice for half and full bends, respectively. Each of the experiment takes 5s to complete data acquisition process.

B. Experimental Results:

HI_1 was the first trial for the half bend of index. Fig. 8 shows the result for the half bend of index and the angles movement ranges from 38.24o - 44.11o, while the voltage ranges from 3.05 V – 3.14 V. HI_2 was the second trial for the half bend of index. Figures 6 and 7 show that the fingers began to bend approaching 0.5 s for both trials and stopped at 4.2 s for the first trial and the second trial stopped at 3.5 s. The time taken for the fingers bend was different for each experiment because of different characteristic of subject.

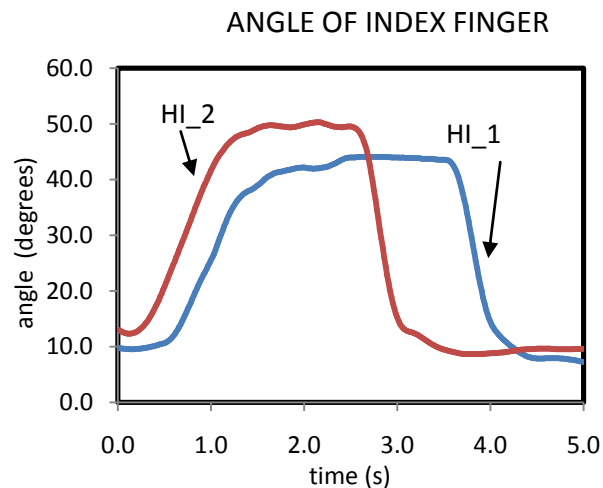


Fig. 6: Half bend of index

HM_1 and HM_2 were the first and the second trials for the half bend of middle. In the first trial, the angle movement ranges from $25.77^{\circ} - 27.46^{\circ}$, while the voltage ranges from 3.09 V to 3.13 V. The angle movement ranges from $25.39^{\circ} - 27.13^{\circ}$ and the voltage ranges from 3.08 V to 3.12 V.

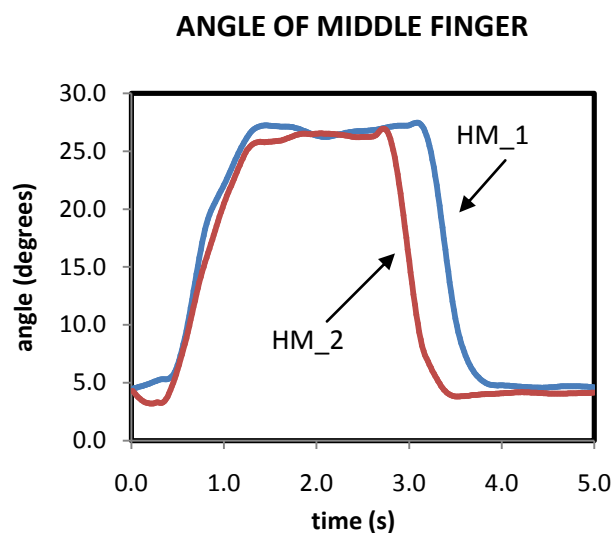


Fig. 7: Half bend of middle

In the full bend experiments, the angle of index ranges from 51° to 57.96° and $50.23^{\circ} - 56.73^{\circ}$ for the first and the second trials, respectively. On the other hand, the voltage ranges from 2.80V – 2.92 V and 2.71V - 2.89V for the first and the second trial, respectively. For the middle finger, the changes angle movement ranges from $38.88^{\circ} - 40.47^{\circ}$ and $39.13^{\circ} - 40.21^{\circ}$ for the first and second trial, respectively. On the other hand, the voltage ranges from 3.02V to 3.07 V and 3.0 V to 3.1V for the first and second trials, respectively.

Discuss:

Based on the experimental results, the ranges of finger bending had been used to program and navigate the mobile robot. The combination of voltages outputted from the sensor #1 and sensor #2 was used to navigate the mobile robot. The mobile robot moved forward without any bending of fingers while the backward direction requires half bend of the both fingers. The instruction to move left and right direction requires only one of the fingers to half bend while full bending of both fingers was used to stop the mobile robot from moving forward.

Conclusion:

From the experiment that had been conducted, the *GloveMAP* was capable to control the directions of the mobile robot by using the voltage ranges that obtain from the fingers bending activities. The combination of the

voltages from index and middle fingers helps to give the instruction to the mobile robot. In the future we will develop a wireless control to navigate the mobile robot by using *GloveMAP*.

ACKNOWLEDGMENT

Special thanks to all members of UniMAP Advanced Intelligent Computing and Sustainability Research Group, COEUAS and School Of Mechatronics Engineering, Universiti Malaysia Perlis (UniMAP) for providing the research equipment's and internal foundations for this project. This work is supported by the Fundamental Research Grant (FRGS: 9013-00313) awarded by the Ministry of Education, Malaysia and Innovation to Universiti Malaysia Perlis (01-01-15-SF0210).

REFERENCES

- Baecker, R. and W. Buxton, 1987. Readings in Human-Computer Interaction, Morgan Kaufmann Los Altos, CA.
- Bending Force of the Index and Middle Fingers for Virtual Interaction," *Procedia Engineering in International Symposium on Robotics and Intelligent Sensors 2012 (IRIS 2012)*.
- Chin-Shyurng Fahn and Herman Sun, 2005. Development of a Dataglove With Reducing Sensors Based on Magnetic Induction. *IEEE Transactions On Industrial Electronics*, 52(2).
- Hazwan Ali, M., W.A.N. Khairunizam, H. Nazrul, Y.C. ADNAN, Seah and A. Juliana Abu Bakar, 2013. "Analysis of Finger Movement by Using Motion Information from *GloveMAP* and Motion Capture System," *International Journal of Mechanical & Mechatronics Engineering IJMME / IJENS*, 13(3): 24-31.
- Hee-Deok Yang, A-Yeon Park, and Seong-Whan Lee, 2007. Gesture Spotting and Recognition for Human-Robot Interaction. *IEEE Transactions on Robotics*, 23: 2.
- Khairunizam Wan, Azri A. Aziz, S.K. Za'aba, Shahrman A.B, Nasir Ayob, Azian Azamimi Abdullah and Zuradzman M. Razlan, 2014. "Gesture Recognition based on Bayesian Inference of Distributed Arm Trajectory," *Advanced Science Letters*, 20(1): 41-45 IF: 1.25
- Nazrul, H. Adnan, W.A.N. Khairunizam, A.B. Shahrman, SK Za'aba, Shafriza nisha, BASAH, Zuradzman M. Razlan, D. Hazry, M. Nasir Ayob, Rudzuan M.Nor and Azri A. AZIZ, 2012. "Measurement of the Flexible
- Omid Reza Esmaili Motlagh, 2006. Development of A Mobile Robot Local Navigation System Based On Fuzzy-Logic Control and Actual Virtual Target Switching. Master of Science Thesis, University Putra Malaysia
- Dongchul Lee and Youngjin Choi*, (2010). Development of Compact Data Glove System, The 7th International Conference on Ubiquitous Robots and Ambient Intelligence, Hanyang University, pp: 627-628.
- Saso Koceski and Natasa Koceska, 2010. Vision-based Gesture Recognition for Human Computer Interaction and Mobile Robot's Freight Ramp Control, *Proceedings of the ITI 2010 32nd Int. Conf. on Information Technology Interfaces, Cavtat*.
- Sears, A. and J.A. Jacko, 2008. *The Human-Computer Interaction Handbook: Fundamentals, Evolving Technologies and Emerging Applications, Second Edition (Human Factors and Ergonomics)*. Lawrence Erlbaum Associates.
- Simone, L.K., E. Elovic, U. Kalambur, and D. Kamper, 2004. A Low Cost Method to Measure Finger Flexion in Individuals with Reduced Hand and Finger Range of Motion, the 26th Annual International Conference of the IEEE EMBS, San Francisco, CA, USA, pp: 4791-4794.
- Tang Sai Hong, Danial Nakhaeinia and Babak Karasfi, 2012. Application of Fuzzy Logic in Mobile Robot Navigation, *Fuzzy Logic - Controls, Concepts, Theories and Applications*, Prof. Elmer Dadios (Ed.), ISBN: 978-953-51-0396-7, InTech.