




## AUSTRALIAN JOURNAL OF BASIC AND APPLIED SCIENCES

ISSN:1991-8178 EISSN: 2309-8414  
Journal home page: www.ajbasweb.com



# Optimal Implementation of Adaptive Bimodal Personal Authentication System in FPGA

<sup>1</sup>S.Hariprasath and <sup>2</sup>Dr.M.Santhi

<sup>1</sup>Assistant Professor Department of ECE Saranathan College of Engineering Trichy, India.

<sup>2</sup>Professor and Head Department of ECE Saranathan College of Engineering Trichy, India.

### Address For Correspondence:

S.Hariprasath, Assistant Professor Department of ECE Saranathan College of Engineering Trichy, India  
E-mail: hariprasath-ece@saranathan.ac.in

### ARTICLE INFO

#### Article history:

Received 10 December 2015

Accepted 28 January 2016

Available online 10 February 2016

#### Keywords:

FPGA implementation, LVQ, iris pattern, palmprint pattern, Biometric Fusion, Sparse Representation

### ABSTRACT

The implementation of adaptive bimodal biometric pattern recognition of palm print and iris pattern in a Field Programmable Gate Array (FPGA) is described in this paper. A Personal authentic system is essentially a pattern recognition system that makes use of biometric traits to recognize individuals. Systems that are built upon multiple sources of information for establishing identity are known as multimodal biometric systems. They can overcome some of the limitations like noisy captured data, intra class variations etc exist in uni-modal biometric system. In this paper an Adaptive Bimodal Personal Authentication System using Sparse Representation based classification (ABPSRC) of iris and palm print using Wavelet Packet Transform (WPT), Haralick Descriptors and a neural classifier is described. The unique feature is single clock cycle implementation of distance computation block and update block. The update block which updates the weights of the winner neuron in a Learning Vector Quantization (LVQ) neural network and the entire architecture is implemented in a pipelined fashion which increases the speed of operation and reduces the hardware complexity. The control block is described using parameterized VHDL program resulting in a finite state machine. The neural network is implemented for input data of 32 bits, 12 input classes and 8 output classes, using virtex-4 xc4vlx15 device. This system can complete recognition in 5.95 ns thus enabling it being suitable for real time pattern recognition tasks. By using 1-7-24 fixed point notation, an area optimized implementation with a recognition rate of 92% is obtained.

### INTRODUCTION

Personal authentication using biometric is the process of establishing a human identity based on a person's physical or behavioral traits. An automated biometric authentication system compares the feature set extracted from the input raw data applied to it as input with the identity models stored in the database. The entire process is performed either to verify a claimed identity or to determine the individual's identity. The performance of such system is evaluated by measuring the trade-off between the false accept rate (FAR) and the false reject rate (FRR). For any system, it is not possible to reduce these two error rates simultaneously. By building a system which accepts more than one biometric trait these two error rates can be reduced considerably. Most multi biometric systems described in the literature employ a common fusion mechanism for all users. Such multi biometric systems (Ross, K. Nandakumar, A. Jain, 2006), merge the information presented by multiple sub-systems. When N independently constructed sub-systems function together, the N output scores are to be consolidated into a single output. This is the problem of score-level fusion which is the most popular fusion approach due to the ease of accessing scores from commercial matchers. In this paper we have followed feature

### Open Access Journal

Published BY AENSI Publication

© 2016 AENSI Publisher All rights reserved

This work is licensed under the Creative Commons Attribution International License (CC BY).

<http://creativecommons.org/licenses/by/4.0/>



Open Access

To Cite This Article: S.Hariprasath and Dr.M.Santhi, Optimal Implementation of Adaptive Bimodal Personal Authentication System in FPGA. *Aust. J. Basic & Appl. Sci.*, 10(1): 467-476, 2016

level fusion. The feature vectors are extracted by computing texture features from iris and palm print with the help of gray level co-occurrence matrix and combined to form a single pattern vector.

The computational power requirement of pattern recognition systems are not achieved by embedded systems built with microprocessors. One solution to the problem is the hardware implementation of software algorithms using Field Programmable Gate Arrays (FPGAs). FPGAs allow the customization of both the architecture and the functionalities of the system for a given purpose. The concurrent design and operation is one of the outstanding features of such reconfigurable devices. Due to its availability and performance, FPGAs have been used in powerful reconfigurable systems. Therefore, systems based on reconfigurable hardware can offer custom-computing machines for specific applications, with orders of magnitude faster than regular software processing in general-purpose processors (Becker, J., R. Hartenstein, 2003).

The objective of this work is to propose a methodology for the implementation of a Learning Vector Quantization (LVQ) Neural Network (NN) as classifier for pattern recognition of iris and palm print using a reconfigurable device. LVQ NNs are frequently used for pattern recognition problems (Kugler, M., H.S. Lopes, 2002 ; Olmez, T., Z. Dokur, 2003) and found to be suitable for hardware implementation. Since they are working based on geometric distance calculation between input samples and reference vectors they require less number of multipliers and less clock cycles.

### **Existing Systems:**

The first successful implementation of iris recognition system was proposed by J.Daughman in 1993 (1988). This work though published more than 30 years ago still remains valuable since because it provides solutions for each part of the system. Most of the systems implemented today are based on this work. They are based on Gabor wavelet analysis (John Daughman, 1988; John Daughman, 1993; John Daughman, 2004) in order to extract iris image features. It consists in convolution of image with complex Gabor filters. As a product of this operation, phasors (complex coefficients) are computed, evaluated and coded by their location in the complex plane. However the Daughman's method is patented which blocks its further development.

In another approach suggested by Lye Wil Liam and Ali Chekima in their paper (Lye Wil Liam, *et al.*, 2002), the iris image is pre processed for contrast enhancement. After preprocessing, a ring mask is created and moved through the entire image to obtain the iris data. By using this data the iris and pupil are reconstructed from the original picture. Using the iris center coordinate and radius, the iris was cropped out from the reconstructed image. The iris data (iris donut shape) is transformed into a rectangular shape. Using a self organized feature map the iris pattern is matched. The network contains a single layer of Euclidean weight function. Manhattan Distances are used to calculate the distance from a particular neuron X to the neuron Y in this neighborhood. The Manhattan Distances without a bias and a competitive transfer function is used to upgrade the weight.

In another method followed by Jie Wang (2006) the iris texture extraction is performed by applying wavelet packet transform (WPT) using Haar wavelet. The iris image is decomposed in to sub images by applying WPT and suitable sub images are selected and WPT coefficients are encoded. K.Grabowski and W.Sankowski have designed another method for iris features extraction method. In their paper (Grabowski, K., W. Sankowski, 2006), Haar wavelet based DWT transform is used.


Ajay Kumar and Helen C. Shen (2004) proposed an approach in which Gabor filter is used for palm print recognition. Fang Li *et al.* (2004) proposed an approach utilizing Line Edge Map (LEM) of palm print as the feature and Hausdorff distance as the distance matching algorithm.

The content of this paper is organized as follows. Section III describes the steps involved in multimodal biometric recognition System. Section IV presents biometric fusion method in general. Section V presents our proposed approach using WPT, statistical classifier and hardware implementation. Section V gives the results of WPT based feature extraction followed by texture filters on the iris and palm print database classification using LVQ network. Finally, section VI gives conclusions and perspectives.

### **Biometric Fusion:**

Generally, most biometric systems employ only one biometric modality for identity management, i.e. only a single distinguished biometric source is utilized during the recognition process. As a result, uni modal biometric systems are intolerant of noise arising from distorted input data acquired by the sensor, signal distortion caused by environmental factors and changes of physical traits over time. In contrast, a multi-biometric system offers the following benefits (Ross, K. Nandakumar, A. Jain, 2006): (i) lower error rate – an amalgam of the information acquired from various sources could possibly reduce error rate, (ii) improved availability – if one biometric trait is missing, this can be supported by other available traits, (iii) higher degree of freedom – a multi-biometric system is able to recognize a user even if he or she uses only a subset of the employed biometrics, (iv) less susceptible to spoof attacks – spoofing of multiple traits at the same time is not easy, and (v) higher robustness – a noisy biometric sample can be clarified by other samples which contain sufficient discriminative information.

In general, a biometric system (Ross, K. Nandakumar, A. Jain, 2006) comprises of four parts, namely, (i) sensor module – to acquire raw biometric impression(s), (ii) pre-processing and feature extraction module – to enhance the acquired impression(s), and to extract salient characteristics from them, (iii) matcher module – to compare the query features with the stored template in order to produce a match score, (iv) decision module – to authenticate or reject a user by comparing the match score against a predefined threshold. Fusion can use multiple representations of a single biometric, a single biometric with multiple matchers or multiple biometric identifiers. Fusion can be performed at different levels: sensor level, feature level, confidence level and abstract level. In this paper feature level fusion technique is used to combine the features extracted from iris and palm print data. Figure.1 shows the block diagram of multimodal biometric system using feature level fusion. For computing the feature vector for combined multimodal system, individually the features are extracted using a feature extractor (Ross, K. Nandakumar, A. Jain, 2006).

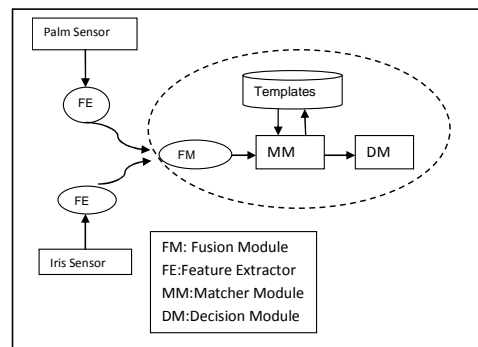

**Fig. 1:** Multimodal biometric system using feature level fusion

In our implementation we have used wavelet packet transform followed by GLCM Unit as Feature Extractor (FE) for both iris pattern and palm print pattern. The extracted image features are applied to GLCM calculator which computes the textural features. As both iris image and palm print are rich with textural information, the co occurrence matrix computed is also rich in features which adequately describe the biometric input. A set of 12 features from iris and a set of 6 features from palm print are computed. By concatenation of 6 features from iris and 4 best features from palm print, the feature set is reduced in size to produce a multi modal pattern vector of size 10 and applied to LVQ neural network.

In another work of the authors (Hariprasath, S., *et al.*, 2015), Gabor filter was used for computing palm print features. The computational complexity is higher than this work and feature vector alignment did not yield correct recognition for all images. Hence in this work, for both the traits, same WPT followed by GLCM are used. The numbers of feature vectors are also reduced from 12 to 10 which significantly reduce the no of computations.

### **Multimodal System and LVQ classifier:**

#### **A. Multimodal Biometric System:**

In this particular approach, two different Feature Extractor modules are used. WPT is used for Iris data and Gabor filters are used for palm print data. The feature vectors are then combined into a multi modal pattern vector of dimension 12 and applied to LVQ classifier.

#### **a) Iris Recognition System:**

An iris recognition system can be decomposed into three modules: an iris detector for detection and location of iris image, a feature extractor to extract the features and a pattern matching module for matching. The iris is to be extracted from the acquired image of the whole eye. Therefore, before performing iris pattern matching, the iris is to be localized and extracted from the acquired image.

#### **i. Iris Localization:**

The first step is iris localization. Using the Integro Differential Operator (IDO) (1) the iris is localized.

$$\max_{(r,x_0,y_0)} \left| G_\sigma * \frac{\partial}{\partial r} \int_{r,x_0,y_0} \left( \frac{I(x,y)}{2\pi r} \right) ds \right| \quad \square \square \square$$

where  $I(x, y)$  is a raw input image.  $r$  is radius of the area,  $G$  is Gaussian window size. The IDO (1) suggested by J.Daughman (1988; 1993) searches over the image domain  $(x, y)$  for the maximum in the blurred

partial derivative with respect to increasing radius  $r$ , of the normalized contour integral of  $I(x, y)$  along a circular arc  $ds$  of radius  $r$  and center coordinates  $(x_0, y_0)$ . The symbol  $*$  denotes convolution and  $G_\sigma(r)$  is a smoothing function such as a Gaussian of scale  $\sigma$ . This operator actually behaves as a circular edge detector, blurred at a scale  $\sigma$ . It searches iteratively for the maximal contour integral derivative at successively finer scales of analysis through the three-parameter space  $(x_0, y_0, r)$  defining a path of contour integration. It finds both pupillary boundary and the outer boundary of the iris. The results are shown in figure2 and 3.


**i. Iris Normalization:**

After the iris is localized the next step is normalization (iris enrollment). Using the equations (2) the iris data are extracted. Different circles with increasing radius and angle are drawn starting from the pupil centre till it reaches near the iris coordinates. The information is extracted.

$$x = c(x) - r * \sin(\theta)$$

$$y = c(y) + r * \cos(\theta)$$

where  $c(x, y)$  denotes center coordinates,  $(x, y)$  denotes coordinates of the image,  $\theta$  is the angle and  $r$  denotes the radius. Figure 3 shows the extracted (normalized) iris data.

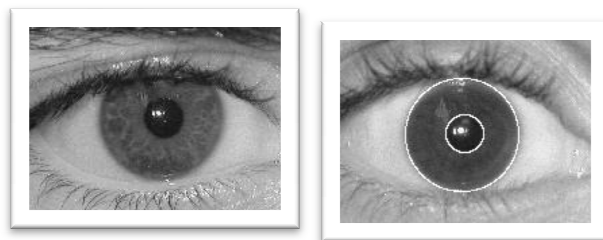

**Fig. 2:** Iris image and localized iris image



**Fig. 3:** Normalized iris

**ii. Wavelet Packet Transform (WPT Approach):**

Wavelet Packets Transform (WPT) is a generalization of Wavelet Transform that offers a richer signal analysis. With WPT, it is possible to zoom into any desired frequency channels for further decomposition. Compared with WT, WPT offers a finer decomposition. When processing some oscillating signals, partition of low frequency parts is not fine enough. WPT can overcome this problem via decomposing high frequency components and more details obtained in WPT yield better representation of signals. As a progressive texture classification algorithm, WPT gives reasonably better performance because the dominant frequencies of iris texture are located in the low and middle frequency channels.

Biometric texture extraction with WPT and encoding procedure involves the following steps:

**1. Decomposition:**


At each stage in the decomposition part of a 2-D WPT, four output sub images are generated. The images contain approximation (A), horizontal detail (H), vertical detail (V) and diagonal detail (D) coefficients respectively. After 3-level WPT, an image has a quad tree with 64 output sub images, each representing different frequency channels (Jie Wang, Xie Mei, 2006). It is shown in Figure 5.

**2. Selection of sub images for feature encoding:**

Processing wavelet coefficients of every sub image is a fair amount of work; furthermore, some of them are representations of high frequency noise which reduce our ability to distinguish each iris. The useful sub images with entropy criterion to make our analysis much more efficient and just as accurate using equation (3).

$$Entropy = -\sum_i \sum_j S_{i,j}^2 \log(S_{i,j}^2) \quad (3)$$

In equation (3)  $S_{i,j}$  is the coefficient of the sub image. It is found that sub-image 10 retains higher entropy than other sub images. Hence it is chosen as the candidate sub-image for feature extraction.

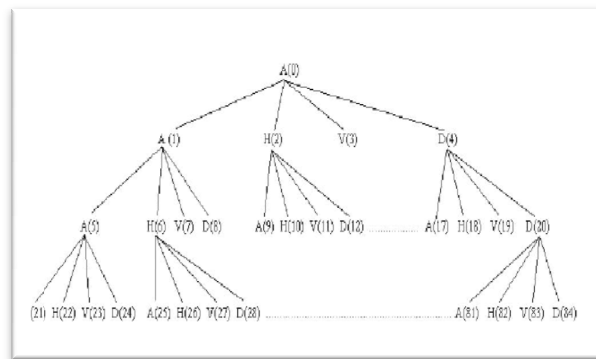

**Fig. 4:** Wavelet Packet analysis

### 3. Iris Feature Encoding:

A code matrix can be achieved by quantizing the coefficients of candidate sub-image and LL3, HL3 or LH3 into one data element each with a suitable threshold  $T$  as shown in (6)

$$C_{ij} = 1 \text{ if } S_{ij} > T;$$

$$C_{ij} = 0 \text{ if } |S_{ij}| < T; \quad (4)$$

$$C_{ij} = -1 \text{ if } S_{ij} < -T$$

where  $S_{ij}$  is the coefficient of a sub-image,  $C_{ij}$  is the corresponding code element and  $T$  is Threshold is a positive number. Equation (4) has 2 abilities of de-noising and finding singular points.  $T$  is chosen as  $T = 3\sigma$  and  $\sigma$  is the variance of the noise. It is reported that the Standard Deviation of the WPT high frequency coefficients (sub -image 84) are having the good estimation of  $\sigma$ . The code matrix gives a good description of both frequency and location content of an image. The chosen sub image is called candidate sub-image.

### D. Iris Matching:


For matching the biometric codes modified Hamming Distance HD as shown in (5) is used.

$$HD = \frac{\text{codeA} \otimes \text{codeB}}{n} \quad (5)$$

In (5)  $\text{codeA}$  and  $\text{codeB}$  are the iris codes of 2 iris to be compared,  $\otimes$  denotes bit wise exclusive OR operation and  $n$  is number of bits in code A.

### b) Palm print Recognition System:

Before feature extraction, it is necessary to obtain a sub-image from the captured palmprint image and to eliminate the variations caused by rotation and translation. After extracting the sub image as region of extraction by pre-processing, the texture features of the palm prints are extracted by wavelet packets as described in section iii. The sample point in the filtered image as shown in Fig. 6 is coded in to two bits ( $b_r, b_i$ ). Depending on the phase value of complex vector generated, using table 1 phase bits are generated. Thus palm print code of 960 bits is generated. By Euclidean distance as classifier, the recognition of new Palmprint and palm prints stored in the database are computed.

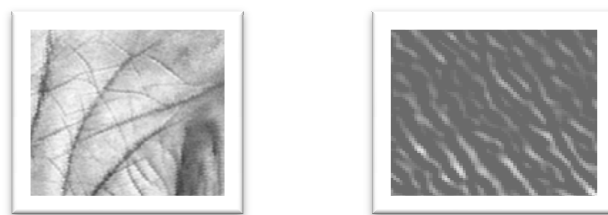

**Fig. 5:** Preprocessed Palm Print and extracted features

### c) Adaptive Bimodal Sparse Representation based classification:

In this paper, 2 stages of sparse coding is proposed. The Iris and palmprint features are separately coded on their corresponding dictionaries. Then the feature weights for fusion are calculated dynamically. Then ABSRC

serially concatenates the weighted features to form a unique multimodal feature vector, which is then classified in the multimodal feature space by using SRC.

#### d) Bimodal Recognition System:

The GLCM calculations which are originally proposed by Haralick (1979) are used to capture the texture information from transformed data of iris and palm print. The best candidate sub image from WPT transformed data of iris and palm print are chosen and Haralick features are computed. From the Haralick features computed for each biometric, 6 iris features and 4 palm print features are combined to produce a pattern vector of dimension 10. The multi modal pattern vector which is of dimension 10 is used to train the LVQ classifier. The Flow of the bimodal recognition system is shown in fig 7.

#### B. LVQ Neural Networks:

The LVQ Neural Network (LVQ NN) is a method for training neural networks for pattern classification. In this method each output represents a particular class. Each class is referred by a weight vector which represents the center of the clusters defining the decision hypersurfaces of the classes. A given class can be defined by a single point or a set of classes, for a better representation of irregular decision surfaces. For training this NN it is necessary to have a set of training patterns with known classes and an initial distribution of the reference vectors. During training, each input sample  $x$  is taken along with its cluster center  $W$  (which is nearer to the input  $x$ ). The known class  $T$  of input sample  $x$  and the class  $C$  represented by the cluster center  $w$  is compared. The center of the cluster  $w$  is updated according to equation 7, where  $\alpha$  = alpha is the learning rate of the NN.

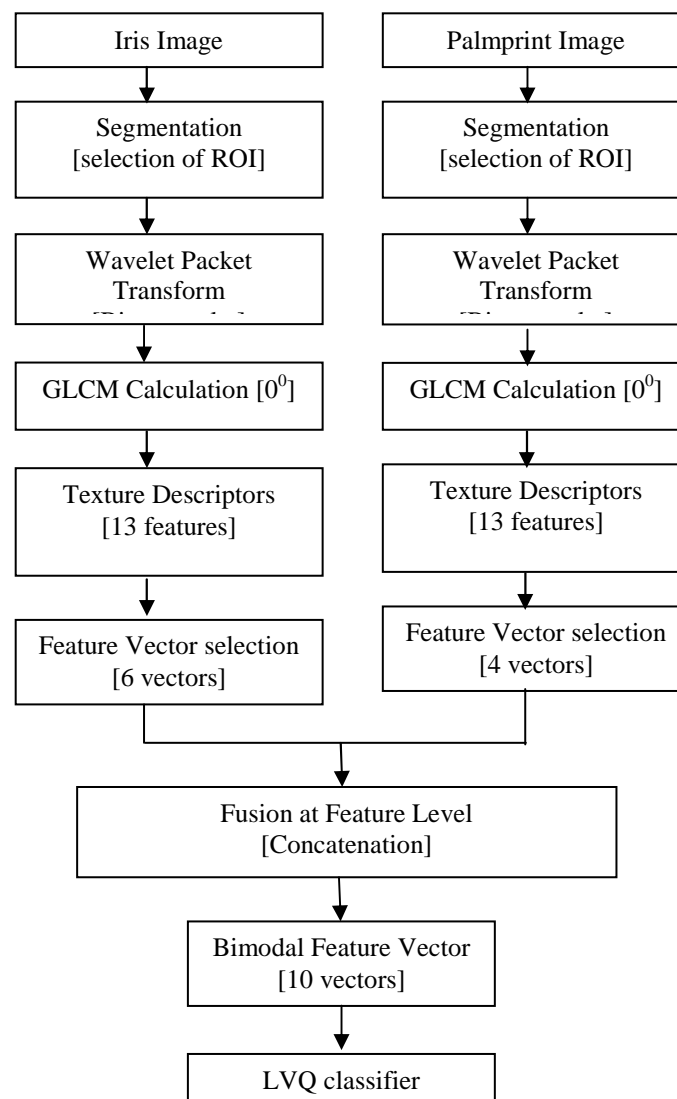


Fig. 6: flow of bimodal pattern recognition

$$\begin{aligned} \text{if } T = c \text{ then } w_{new} &= w_{prev} + \alpha \cdot [x - w_{prev}] \\ \text{if } T \neq c \text{ then } w_{new} &= w_{prev} - \alpha \cdot [x - w_{prev}] \end{aligned} \quad (7)$$

Training is done for all input variables several times, always taken them in a random order. Usually, training is concluded when clusters get stable, or either a previously specified number of iterations is reached. Basically, after being trained, a LVQ NN becomes a vector comparator. Every new input will be assigned to a class which cluster center is the most similar to it. The similarity (or dissimilarity) measure of two generic points  $x$  and  $y$  can be implemented as the geometric distance between them. A general distance norm is given by equation 8, where  $n$  is the dimensionality of the space and  $w_i$  a weighting coefficient.

By taking all the input variables in a random order training is performed several times and it is stopped when the clusters become stable or a previously set number of iterations is reached. After getting trained, a LVQ NN becomes a vector comparator. Whenever a new input is presented to the nn, it is assigned to a class whose cluster centre is most similar to the input. The similarity (or dissimilarity) measure of two generic points  $x$  and  $y$  can be implemented as the geometric distance between them. By For certain applications which require faster computation, Manhattan distance which is shown in equation 8 is used as similarity measure.

$$d(x, y) = \sum_{i=1}^n w_i \cdot |x_i - y_i| \quad (8)$$

## RESULTS AND DISCUSSION

The Computation of Textural features from the chosen sub image obtained from WPT followed by Texture filters, usage of feature level fusion to combine the features of two traits and LVQ neural classifier usage are the novel contributions in this proposed work. To the knowledge of the authors, no such previous work exists.

The LVQ network architecture used in the bimodal recognition systems includes 12 units on the input layer, which represent the 12 classes formed by the concatenation of iris and palm print feature vectors. There are 3 units on the output layer that characterize the one of 9 output classes. After training with 75 % of the input data, testing is performed with the remaining data as described in section IV.

The results of recognition in terms of False Acceptance Ratio and False Rejection Ratio are given in the table 1 for Iris and table 2 for palm print. In table 3, results are given for bimodal recognition System. The device utilization report is shown in table 4.

The Performance of the proposed iris recognition system using bi orthogonal wavelets in WPT is shown in the figure 8. In this figure classes refer to the image classes of iris images. Class 1 refers to the user 106 and class 8 refers to user 113. The accuracy of the proposed system varies when different feature vector is chosen.

**Table i:** Recognition Performance Of Iris Feature Vector Using Different Mother Wavelets

| Recognition performance |               |                       |
|-------------------------|---------------|-----------------------|
| Wavelet type            | Accuracy in % | Feature vector length |
| Sym2                    | 81.50         | 288                   |
| bior 1.5                | 92.00         | 640                   |
| bior 3.9                | 93.00         | 1280                  |

**Table ii:** Recognition performance of palm print feature vector using bior 3.9 filter


| Palm print recognition performance |        |        |        |        |        |        |
|------------------------------------|--------|--------|--------|--------|--------|--------|
| Threshold                          | 0.8276 | 0.7589 | 0.6691 | 0.5646 | 0.7648 | 0.6399 |
| FAR                                | 89%    | 73%    | 40%    | 14%    | 76%    | 31%    |
| FRR                                | 6%     | 23%    | 49%    | 77%    | 20%    | 57%    |

**Table iii:** Performance Of feature vector for multi modal biometric


| Modality                          | Accuracy in % | Feature vector |
|-----------------------------------|---------------|----------------|
| Iris                              | 91.50         | 960 bits       |
| Palmprint                         | 89.46         | 960 bits       |
| Combination of Iris and Palmprint | 98            | 10 Features    |


**Table IV:** Device utilization report summary for virtex 4 device

| Device utilization summary:      |                 |    |  |
|----------------------------------|-----------------|----|--|
| -----                            |                 |    |  |
| Selected Device : 4vlx15sf363-12 |                 |    |  |
| Number of Slices:                | 49 out of 6144  | 0% |  |
| Number of Slice Flip Flops:      | 64 out of 12288 | 0% |  |
| Number of 4 input LUTs:          | 64 out of 12288 | 0% |  |
| Number used as RAMs:             | 32              |    |  |
| Number of IOs:                   | 70              |    |  |
| Number of bonded IOBs:           | 70 out of 240   |    |  |
| Number of GCLKs:                 | 1 out of 32     | 3% |  |
| Number of DSP48s:                | 1 out of 32     | 3% |  |

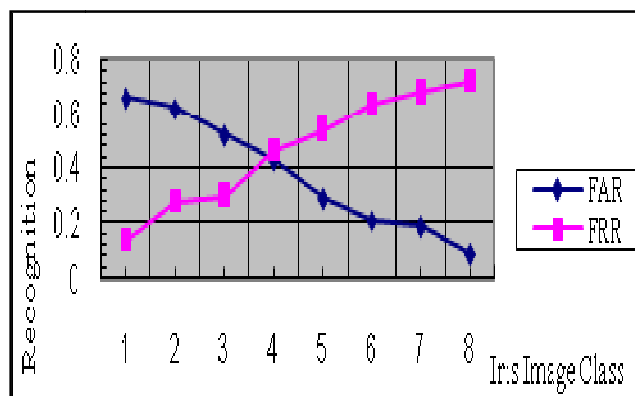**Fig. 7:** IRIS recognition system performance using Bi orthogonal wavelets

The performance analysis of palm print recognition system using Bi orthogonal filters is shown in figure 9. By choosing the Bior 1.5 filter, the palm print filtered image is chosen as candidate image for further processing. The FAR and FRR are calculated and Equal Error Rate (EER) obtained is 0.42%. This value is found to be high. To improve the EER value, further the palm print input image is filtered using other filters. When Bior filter 3.9 is used, low EER rate obtained as 0.26%.

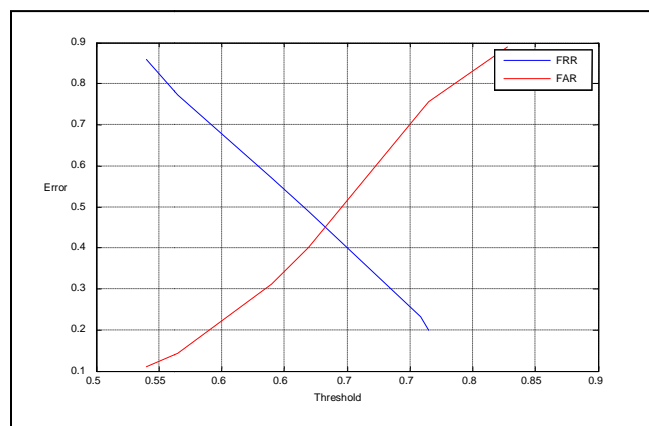**Fig. 8:** Performance analysis of Palmprint recognition using Bior 3.9 filters

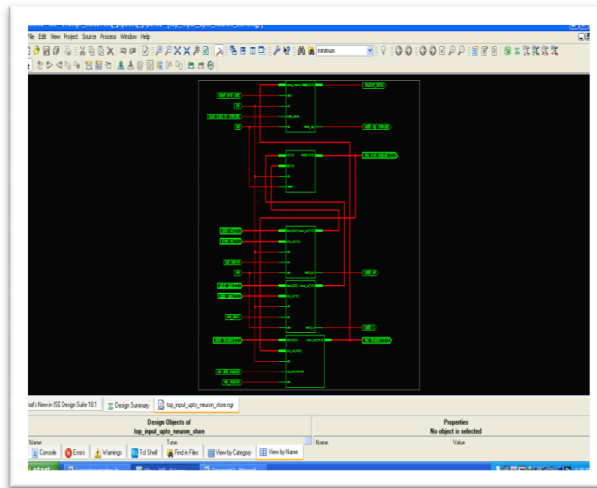

**Fig. 9:** RTL block diagram of LVQ neural network

### Conclusion:

The experimental results clearly demonstrate that the feature vector consisting of concatenating the candidate sub-image, LH3 and HH3 (forming iris feature vector) and 3<sup>rd</sup> orientation of 6<sup>th</sup> scale decomposed palm print feature vector gives better results. The Symlets wavelet is particularly suitable for implementing high-accuracy iris verification or identification systems, as feature vector length is at the least compared to other wavelets.

In Hardware implementation part of LVQ NN, the basic blocs required are adder and multiplier. The inputs applied to multiplier are of 32 bits in size. They are in fixed point notation of 1-7-24. Since  $\alpha$  is the learning parameter which decides the rate of learning and influences the success of classification, the value chosen is 3 bits after decimal point. Using a multiplexer as a selection unit, the adder/subtractor unit is controlled. Hence the area occupied in terms of LUTs is reduced. This produces an optimal implementation of area in FPGA.

For a reduction of 3% accuracy, the length of the feature vector and no of bits required to represent the iris signature is reduced substantially in the case of biorthogonal wavelets. The bior3.9 wavelet gives an accuracy of 97.00% but the feature vector length is approximately 5 times larger compared to feature vector obtained using Symlets wavelet. By combining the iris and palm print recognition scheme the accuracy of the recognition is improved. By feature level fusion of palmprint and iris feature vectors, the overall recognition rate is improved to 98%.

### REFERENCES

- Ajay Kumar, Helen C. Shen, 2004. "Palm print Identification using PalmCodes", Proceedings of the Third International Conference on Image and Graphics.
- Becker, J., R. Hartenstein, 2003. "Configware and morphware going mainstream", Journal of Systems Architecture, pp: 127-142.
- Fang, Li, Maylor K.H. Leung, Xiaozhou You, 2004. "Palmprint Identification Using Hausdorff Distance", 2004 IEEE International Workshop on Biomedical Circuits & Systems.
- Grabowski, K., W. Sankowski, 2006. "Iris recognition algorithm optimized for hardware implementation", *IEEE*.
- Haralick, R.M., 1979. "Statistical and Structural Approaches to Texture", Proceedings of the IEEE, 5: 786-804.
- Hariprasath, S., T.N. Prabakar, M. Santhi, 2015. "A Pipelined Approach for FPGA Implementation of Bi Modal Biometric Pattern Recognition Using Prototype Based Supervised Neural Network" 2015, Proceedings of ISCO, pp: 206-214.
- Jie Wang, Xie Mei, 2006. "Iris Feature extraction based on wavelet packet analysis", *IEEE*.
- John Daughman, 1988. "Complete Discrete 2-D Gabor Transforms by Neural Networks for Image Analysis and Compression", *IEEE Transactions on Acoustics, Speech and signal Processing*, 36(7).
- John Daughman, 1993. "High confidence visual recognition of persons by a test of statistical independence", *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 15: 11.
- John Daughman, 2004. "How iris recognition works" *IEEE Transactions on Circuits and Systems for Video Technology*, 14: 1.

Kugler, M., H.S. Lopes, 2002." Using a chain of LVQ neural networks for pattern recognition of EEG signals related to intermittent photic-stimulation", In: Proc. VII Brazilian Symposium on Neural Networks, IEEE Computer Society, Los Alamitos, pp: 173-177.

Lye Wil Liam, Ali Chekima, Liau Chung Fan, 2002. "Iris recognition using self-organizing neural network", *IEEE*.

Olmez, T., Z. Dokur, 2003. Classification of heart sounds using an artificial neural network. *Pattern Recognition Letters*, pp: 617-629.

Ross, K. Nandakumar, A. Jain, 2006. "Handbook of Multibiometric", Springer Verlag.